P1 15 Copies

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

Candidate's Name ..... 1 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.						
Personal Number						

Do not write in this margin

UACE

Do not write in this margin


P250/1 – PHYSICAL GEOGRAPHY
SCORE GUIDE

Introduction – location
- Physical Landscape
- Vegetation
- Climate

SECTION A

ITEM 1: MAP SKILLS:

A SKETCH MAP OF MOROTO SHOWING THE LANDSCAPE OF THE AREA. MI

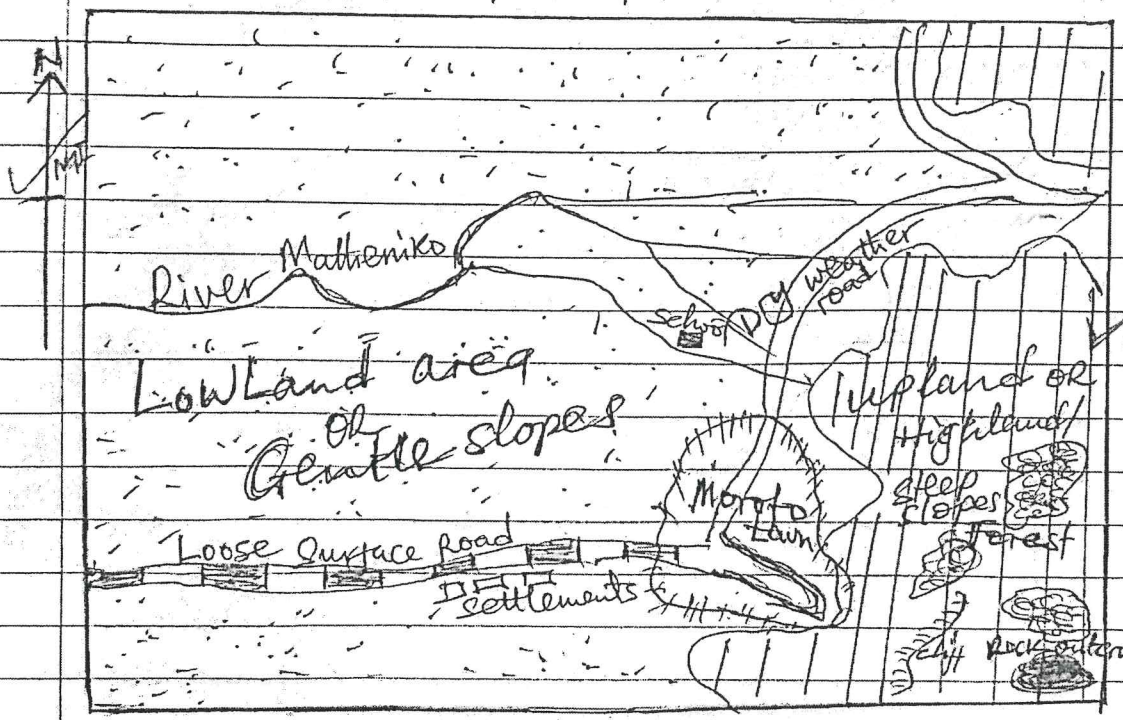

KEY/MI
- Upland/Highland/Steepslopes
- Rivers

© 2024 Uganda National Examinations Board

CamScanner

2

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 2 .....
Signature .....
Subject ..... Paper code ..... / .....
Random No.
Personal Number

Do not write in this margin

Marginal information (MI)
- Title
- Frame / boundary
- Compass direction
- Key / Labeling

MI = 04

Landscape / features;
* physical features (varied)
- upland / steep slopes
- Low land / Gentle slopes
- cliffs
- outcrop rocks
- Ridges
etc

Relief - 01

- Forests
- scrubs
- woodlands
- scattered trees
etc

Vegetation - 01

- Rivers

Drainage - 01

Phy - 03

* Human features;
- Roads (Any type)
- Settlements
- Boreholes
- Moroto town
etc

any 2

09

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

3

Do not write in this margin

Candidate's Name .....

Signature .....

Subject ..... Paper code ...../.....

Random No.						
Personal Number						

* Possible investment potentials for the Local people based on the physical Landscape.

- Irrigation farming due to presence of permanent rivers such as river Matheniko in the west of region which provide water for irrigation.
- Cultivation/growing of hardy crops such as millet, sorghum, maize etc due to presence of extensive land which is gently sloping for easy mechanisation in the west.
- Controlled Livestock rearing/Ranching due to presence of scrub vegetation for pasture, extensive unoccupied land like at Operiper, Kadilakenyi etc.
- Bee-keeping/Apiary due to the presence of forests, woodlands which attract bees eg in moroto forest reserve in the south East and East of the map.
- Solar power generation and manufacture of solar panels due to intense heat/sunshine evidenced by the existence of scrub vegetation at Lotakelo, Operiper,

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

Candidate's Name 4

Signature .....

Subject ..... Paper code ...../.....

Random No.

Personal Number

UACE

Do not write in this margin

in the west of the map etc.
- Establishment of tourism/business facilities such as hotels, restaurants, Lodges, camping sites etc to cater for the tourists and create employment opportunities for the local people due to presence of tourist attractions such as the steepslopes, forests, cliffs etc in the South-East and East of the map.
- Development of industries due to provide employment opportunities for the local people due to gentle slopes in the west for easy construction and permanent rivers like river Mathenko that provide the needed water in the industries.
- Art and crafts making due to presence of a variety of vegetation types such as forests, woodlands and scrubs in the East and west of the map.
- Herbal medicine extraction and selling due to a variety of vegetation types such as forests in south East and scrubs in the west.

NB project + evidence of physical landscape + Location.

© 2024 Uganda National Examinations Board

CamScanner

Do not write in this margin

Candidate's Name ..... 5 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.

Personal Number

UACE

Do not write in this margin

Sustainable solutions to address the slope related hazards limiting development in Moroto.

- Afforestation/Re-afforestation in the steep slopes in the South East to bind soil particles together hence reducing soil erosion and landslides.
- Construction of winding roads through the steep slopes in the South East to solve the problem of inaccessibility and ~~remotenes~~ remoteness.
- Practicing terracing on the steep slopes in the East, South-East to reduce soil erosion and landslides by reducing the steepness of the slopes.
- Gazetting Forest reserves on the steep slopes in the South East and East of the map to bind soil particles together hence controlling soil erosion and landslides.
- Contour ploughing in the steep slopes in the South-East and East to bind soils together and reduce surface runoff hence improving soil fertility.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 6 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

Do not write in this margin

- Resettling of people from steep slopes in the East and South East to safer areas to reduce the negative effects of Landslides.
- Agroforestry on the steep slopes in the South East and East where tree-roots bind soil particles together hence controlling soil erosion.
- Mulching which involves covering the topsoil with crop residues and other materials hence reducing surface run off and effect of splash erosion and therefore controlling soil erosion on the steep slopes in in the South East and East.
- Building retaining walls along roads that cut through hill slopes or use of gabions ie wire mesh to hold soil particles together and make the soils firm hence controlling landslides and soil erosion like in South East.
- prohibit settlement and other human activities on the very steep slopes/convex slopes in the South East to reduce

© 2024 Uganda National Examinations Board

CamScanner

Do not write in this margin

Candidate's Name ..... 7 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.

Personal Number

UACE

pressure on such steep slopes and turn to slope friendly economic activities hence reducing soil erosion and landslides.

- Construct Wall which are very strong along rivers near settled areas in the west to reduce the effects of severe flooding in Low lying areas.

- Continous community sensitization on slope related hazards and management to promote proper landuse practices such as afforestation that binds soil particles together on steep slopes in the East hence controlling soil erosion and landslides.

- Effective use of Early warning systems through meteorological and environmental data to alert people of the possible occurrence of landslides and flooding in steep slopes in the East and lowlands in the west respectively such that they can escape and avoid death.

ETC

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 8 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

NB Solution + challenge + Explanation of how the challenge will be solved;

You conclude for coherence purposes.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 9 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.						
Personal Number						

Do not write in this margin

Item 2:

The geomorphic processes operating in the area (Lower stage/ old stage of the river.

- Candidates should state that the river is in the old stage with the following characteristics;

- Reduced river energy due to a fall in the gradient of the slope.
- Reduced speed of the river due to low gradient.
- River carries out deposition
- The river carries out lateral erosion
- The river's channel becomes broad and U-shaped due to lateral erosion
- The river meanders in the flood plain etc.

- The geomorphic processes operating in the area/Lower stage/ old stage of the river includes;

© 2024 Uganda National Examinations Board

CamScanner

- Lateral erosion; Although vertical erosion is greatly reduced, the river continues to erode its banks sideways. This causes the river channel to become wider and encourages development of large meanders.

- Transportation; The river continues to transport materials in this stage especially fine particles such as silt and clay. However, its ability to carry large, heavy materials is reduced because its velocity and energy are generally low.

- Deposition takes place; This is the dominant process because the river has lost much of its energy due to the fall in gradient. The river deposits much of the sediments it has transported from upstream. Deposition builds features such as floodplains, meanders, deltas etc.

© 2024 Uganda National Examinations Board

CamScanner

Do not write in this margin

Candidate's Name ..... //

Signature .....

Subject ..... Paper code ...../.....

Random No.						
Personal Number						

UACE

Do not write in this margin

- How the above processes have led to formation of the observed landforms in the old stage of the river;

- A floodplain. This is a wide, flat and extensive low land of alluvium on the floor of the broad river valley. It forms in the lower stage where the area is flat, wide with a very low gradient. The processes of formation starts with widespread deposition of the Load during the flood period. The low energy and low speed of the river allows materials to be deposited broadly within the valley. As flooding continues, the side banks of the river are gradually extended to form a bowl shaped river valley hence a flood plain

Diagram should be drawn.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... /2 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

- River meanders; A river meander is a curved bend of a river. Formed in the old-stage of the river. Formed due to existence of obstacles in the river's course. The river curves around the obstacles with erosion on the outer curve to create the river cliff and deposition in the inner curve to create the slip-off slope. Such alternate erosion and deposition therefore leads to development of the meanders.
- Meanders may also develop from the herical flow theory.
- Meanders are also formed through minimisation of energy theory.
- Siltation theory
- Riffle and pool theory etc.

Diagram showing river meander should be drawn.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 13 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.					
Personal Number					

- Ox-bow lake; An ox-bow lake is a horse-shoe shaped lake; formed where there are over-pronounced meanders. Formed in the old stage of the river due to continued deposition. ~~Formed from over-pronounced~~ Formed from over-pronounced meanders with a narrow neck. After deposition of the materials, the narrow neck is sealed off hence forming an ox-bow lake.

Illustration of ox-bow lake:

- Braided channel; This refers to a wide, shallow river channel in which the river divides and subdivides itself into a number of interconnecting channels separated by sand banks and islands of alluvium. The sand bars and main channels may disappear during floods since they submerge. River braiding occurs after the deposition of large quantities of

The Question doesn't describe the Ox-bow lakes and braided channels

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name 14

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

Do not write in this margin

- materials eg sand and gravel on the river bed. These gradually increase and form islands which the river dodges by subdividing into small channels hence forming braided river channel.

Diagram is needed.

- Deltas; This is a large flat low lying swampy plain characterised by presence of deposited materials, distributaries, small lakes and lagoons and vegetation and triangular in shape.

Conditions for formation of a delta;

- The river must have a large load.
- It must flow at a slow speed and allow deposition to occur in the river's mouth.
- The load must be deposited faster than it can be removed by the currents and tides in the sea.
- etc

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

Do not write in this margin

Candidate's Name ..... 15 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.						
Personal Number						

UACE

Do not write in this margin

Process of formation of deltas;

- As the gradient ~~below~~ becomes low, the speed reduces and deposition begins to occur in the rivers mouth. The sediments collect on the continental shelf in layers and eventually a low platform develops. When they appear above the water, the river splits up into several distributaries, spits and lagoons begin to form. The lagoons become filled with the sediments, and swamps develop. As vegetation continues to grow in the swamps, they may disappear to form dry land.

Short Illustration of Different types of Deltas.

Types of deltas include;

- Arcuate deltas
- Estuarine deltas
- Bird's foot delta.

NB explain with diagrams.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 16 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

Do not write in this margin

* Measures to manage the challenges identified in the old stage of the river;

The features in the old stage as assessed in the scenario create challenges such as flooding, siltation, river bank erosion, waterlogging and destruction of settlements and farmlands. The following measures can help to manage the challenges;

- Construction and maintain dykes/ levees along sections of the river that frequently overflow to control flooding.
- Build flood control dams and reservoirs upstream to regulate the amount of water reaching the lower courses of rivers to control flooding and siltation.
- Establish flood warning systems so that communities can evacuate or protect their property before

©2024 Uganda National Examinations Board

CamScanner

Do not write in this margin

Candidate's Name ..... 17 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.						
Personal Number						

UACE

Do not write in this margin

floods occur.
- Avoid / limit people from constructing settlements and other important infrastructure on flood plains and river banks to ~~con~~ reduce the destruction done by floods.
- Plant trees in the river catchment area and along river banks to reduce surface runoff and soil erosion.
- Protect existing forests and wetlands because they absorb and temporarily store excess water.
- Control deforestation and overgrazing which expose soil to erosion in the flood plain.
- Regularly remove excessive sediments from important channels and drainage structures through carefully planned dredging to control flooding and siltation.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

Do not write in this margin

Candidate's Name 18

Signature .....

Subject ..... Paper code ...../.....

Random No.					
Personal Number					

- Use gabions, stone pitching and other bank-protection structures where erosion threatens settlements, roads and bridges.
- Restrict/Limit activities such as uncontrolled sand mining and cultivation very close to river banks.
- Construct and maintain drainage channels to remove excess water from water-logged areas.
- Introduce zoning regulations that restrict settlement and construction in high-risk flood and landslide zones.
- Locate schools, hospitals, roads and other major infrastructure on relatively safer and elevated land.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Candidate's Name 19

Signature .....

Subject ..... Paper code ...../.....

Random No.

Personal Number

Do not write in this margin

Do not write in this margin

- Encourage flood-resistant construction in areas where settlement on flood plains cannot be completely avoided.
- protect and restore wetlands hence prevent unnecessary drainage and destruction of wetlands in the river basin. This is because wetlands act as natural water-storage areas, reducing the volume and speed of floodwater. ~~reducing the~~
- Encourage farmers to grow flood-tolerant crops in areas that are regularly flooded.
- Establish seasonal farming calendars based on expected flooding patterns
- Educate communities about the causes and dangers of flooding siltation and bank erosion and ways to control them.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name 210

Signature .....

Subject ..... Paper code ...../.....

Random No.

Personal Number

- ~~Establish~~ community emergency plans, Evacuation routes and safe shelters.

ETC Measures should be connected to challenges

NB You conclude for ~~coherence~~ coherence purposes.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 21 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

Do not write in this margin

SECTION B

Item 3

Candidates are expected to do the following;

- Identify that the weather and climate conditions described refer to climate change.
- Define climate change as a shift in the Long term patterns of climatic conditions such as temperature and ~~precipitation~~ precipitation/rainfall.

The major indicators of climate change include;

- Rainfall seasons are coming too late and sometimes too early or ~~unpredictable~~ unpredictable eg in Nakasongola
- prolonged droughts in some areas such as Gulu, Kitgum etc
- Ocean heat content is increasing eg in the Indian Ocean.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... JJ .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

Do not write in this margin

- Sea-levels are rising like in the Indian Ocean.
- Air temperatures are increasing eg in Mubende.
- Melting of glaciers like on Mountain Rwenzori.
- Heavy/excessive rainfall in some areas causing flooding like in Kampala.

etc

- How different Sectors identified are causing climate change;

* How Agricultural sector is causing climate change;
- Through Livestock farming, methane gas is produced during digestion which is a powerful greenhouse gas that traps heat in the atmosphere leading to global warming.
- It has led to increased deforestation for agricultural land lead to increasing

© 2024 Uganda National Examinations Board

CamScanner

Candidate's Name ..... 23 .....

Signature .....

Subject ..... Paper code ...../.....

Random No. | | | | | | |

Personal Number | | | | |

Do not write in this margin

UACE

Do not write in this margin

temperatures.

- It has led to increased use of fertilizers to increase agricultural output eg use of nitrogen based fertilizers which release nitrous oxide which is a potential green house gas that is leading to global warming.

etc

* How transport sector is causing climate change.

- Transport sector is causing emission of green house gases and other pollutants as most vehicles use diesel and petro hence causing global warming.
- Increased use of old and poorly managed motor-vehicles which have inefficient engines that consume more fuel and emit high levels of green house gases leading to global warming.
- Air and water transport are also causing climate change as air crafts

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name 24

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

burn large quantities of aviation fuel, releasing carbon-dioxide etc causing increasing temperatures. etc.

* Settlements and Urbanisation;

- It is causing increased use of fossils fuels as settlements and urban centres expand
- It is leading to increased deforestation and destruction of wetlands.
- It is leading to increased establishment of industries that cause global warming.
- It is leading to increased construction of concrete and buildings that absorb and retain heat making towns/cities become warmer than the surrounding rural areas.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 25 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.						
Personal Number						

Do not write in this margin

* Mining sector;

- It is leading to increased deforestation
- It is leading to increased fossils fuel consumption
- Increased transportation emissions etc, All which causing increased accumulation of green house gases in the atmosphere leading to global warming.

* Industrial Sector;

- Industries are leading to ~~A~~sed burning of fossils fuels like coal, petroleum and natural gas.
- They are leading to increased ~~poor~~ disposal of wastes which produce methane gas during burning.
- Cement manufacture releases alot of dust particles and heavy metals into the atmosphere.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 26 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

- Industries are leading to increased atmospheric pollution.

* Industries are contributing to increased energy demands etc, All which are causing global warming.

NB Each sector should be considered during the analysis.

* Ways of addressing climate change problem;

~~implementation~~

- planting trees
- planting drought resistant crops
- Irrigation farming.
- Use of renewable source of energy.
- proper waste management eg recycling of wastes.

© 2024 Uganda National Examinations Board

Do not write in this margin

Candidate's Name ..... J7 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.

Personal Number

UACE

Do not write in this margin

- Strengthening laws on environment
- promoting awareness campaigns.
- protecting threatened forests and wetlands, etc
- promotion of more fuel efficient vehicles, hybrid vehicles, cleaner diesel vehicles etc
- Integrating climate change into education System to increase awareness
- etc

Item 4

The weather condition described is Solar radiation.

- Define Solar radiation as the energy emitted by the Sun in form of electromagnetic waves that travel through space and reaches the Earth.
- Describe Solar radiation interaction with the atmosphere and the Earths Surface ie Solar path - as follows;

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 28 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

Do not write in this margin

- Absorption
- Reflection
- Scattering
- Transmission

} These should be explained in details.

- Layers of the atmosphere.
- Draw/illustrate the solar path

Factors/conditions influencing the incoming solar-radiation.

- Latitudinal Location
- The rotation of the Earth.
- The influence of clouds in the atmosphere.
- The influence of atmospheric conditions- ie impurities in the atmosphere.
- Influence of slope and aspect.
- Nature of the Earth's surface.
- The influence of vegetation cover
- The influence of humidity.
- The influence of Green house gases

etc.

NB Explain these points.

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

Do not write in this margin

Candidate's Name ..... 29 .....

Signature .....

Subject ..... Paper code ...../.....

Random No.

Personal Number

UACE

Do not write in this margin

Strategies to commercialize the use of ~~the~~ solar-radiation for economic benefit of the communities

- Establish large-scale solar power plants in these regions.
- Establish and promote solar-powered irrigation farms
- Encourage and promote the use of solar drying centres or machines for drying agricultural products.
- Establish and promote solar-powered cold storage facilities eg install - Solar refrigerators and cold ~~room~~ rooms to preserve milk, fish, meat etc
- promote solar-powered agro-processing plants
- promote and expand solar-home systems by encouraging house holds to install rooftop solar panels to power lighting, charging phones etc.
- Develop and encourage solar powered small scale-businesses in rural communities in these regions

© 2024 Uganda National Examinations Board

CamScanner

UGANDA NATIONAL EXAMINATIONS BOARD
UGANDA ADVANCED CERTIFICATE OF EDUCATION
NOVEMBER - DECEMBER, 2024

UACE

Do not write in this margin

Candidate's Name ..... 30 .....

Signature .....

Random No.

Subject ..... Paper code ...../.....

Personal Number

- promote and invest in solar street lighting whereby install solar powered street lights in towns and trading centres to improve security and reduce electricity.
- promote solar powered educational and health facilities by equipping schools and hospitals with solar systems to provide reliable electricity for lighting, computers, laboratories etc
- Develop solar powered telecommunication systems

etc

© 2024 Uganda National Examinations Board

CamScanner